



## Flat Roof TUBULAR SKYLIGHTS

EASILY AND AFFORDABLY

### Add Soft, Natural Light

Tubular Skylights offer homeowners an affordable day-lighting option for rooms where adding additional windows isn't practical. Unlike traditional skylights, tubular skylights use a "light pipe" to collect the sun's rays without transferring the sun's heat. As sunlight enters through the skylight dome, the rays bounce downward inside the light pipe until emitted through the ceiling's diffuser. Our flat roof model features a flashing with a straight shaft providing a vertical opening for the light pipe. It can accommodate roofs with up to a 2:12 slope.



LOW SLOPE



RESIDENTIAL

### Flat Roof Tubular Skylight

10" | 13" | 18" Models

- Attaches directly to the roof decking
- Designed for residential flat roofs up to 2:12 pitch
- Installs easily with no structural changes or wiring required
- Performs optimally from sunup to sundown
- Disperses light evenly while blocking 99% of harmful UV rays
- Condensation release dome prevents fogging due to humidity
- Aluminum housing is powder coated both inside and out to prevent corrosion
- Available in 3 colors: black satin, bronze gloss or mill finish
- Hurricane Tested and Rated, HVHZ Compliant
- Florida Building Code Approved
- Limited Lifetime Warranty



# Flat Roof Tubular Skylight Specs



**10" Kit**

|                  |              |
|------------------|--------------|
| Model #:         | 10KFF        |
| Coverage:        | up to 150 sf |
| Wattage:         | up to 300 sf |
| Kit Height:      | 4 feet       |
| Max Length:      | 18 feet      |
| Roof Slope:      | up to 2:12   |
| Flashing Colors: |              |



**13" Kit**

|                  |              |
|------------------|--------------|
| Model #:         | 13KFF        |
| Coverage:        | up to 300 sf |
| Wattage:         | up to 500 sf |
| Kit Height:      | 4 feet       |
| Max Length:      | 20 feet      |
| Roof Slope:      | up to 2:12   |
| Flashing Colors: |              |



**18" Kit**

|                  |                |
|------------------|----------------|
| Model #:         | 18KFF          |
| Coverage:        | up to 500 sf   |
| Wattage:         | up to 1,000 sf |
| Kit Height:      | 4 feet         |
| Max Length:      | 20 feet        |
| Roof Slope:      | up to 2:12     |
| Flashing Colors: |                |

## Accessories



**Dimmer Kit**

Dims incoming light entering home during daytime hours.



**Electric or Solar Light Kits**

Installs inside tube shaft to provide light at nighttime.



**Vent Kit**

Exhaust system for 10" model – perfect for bathrooms.



**Extra Light Pipe / Elbows**

12" or 24" pipe extensions and elbow/angle adapters.



**Flashing Skirt**


Ensures a weather-tight installation on tile roofs.




**Turret Extension**

Raises dome assembly 3" to clear thicker tiles.




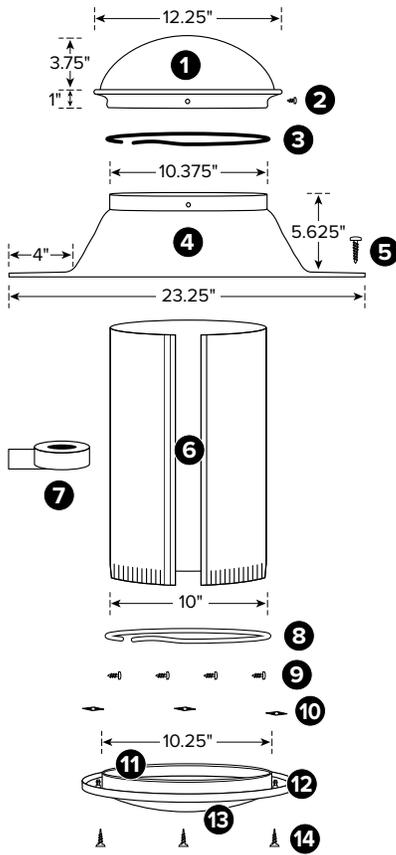

**10" MODEL**

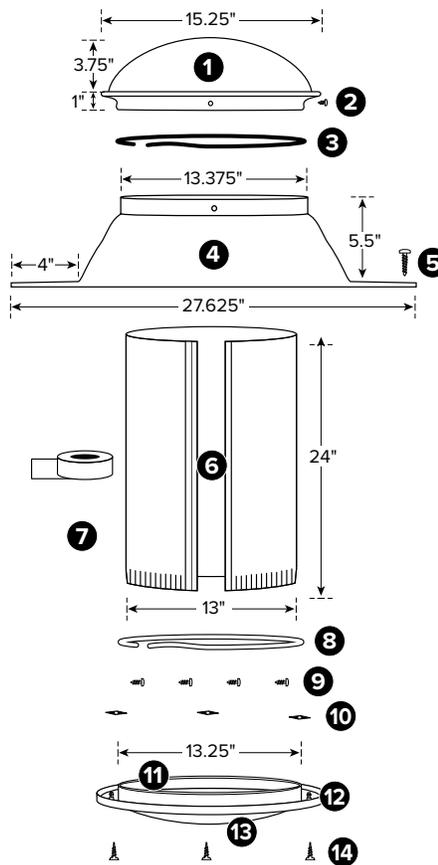

**13" MODEL**

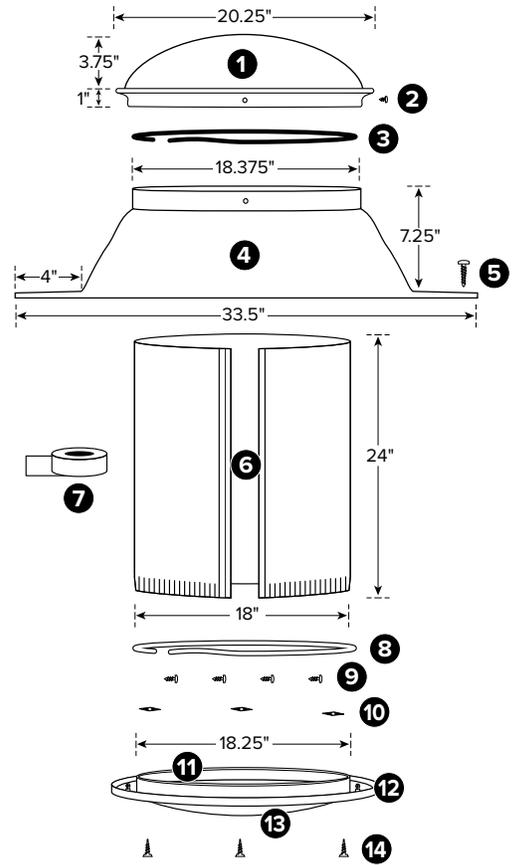

**18" MODEL**

**FLAT ROOF  
RESIDENTIAL MODEL  
TECHNICAL SPECIFICATIONS**

| Model | Coverage     | Wattage           | Max Tube |
|-------|--------------|-------------------|----------|
| 10"   | up to 150 sf | up to 300 watts   | 18'      |
| 13"   | up to 300 sf | up to 500 watts   | 20'      |
| 18"   | up to 500 sf | up to 1,000 watts | 20'      |

*Note: 18" model used on homes with 24" on center construction.*

1. Clear UV Protected, 100% High Impact Modified Acrylic Dome
2. (4) Phillips Head Stainless Steel .25" Sheet Metal Screws
3. Black Nylon Horse Hair Gasket (self-adhesive)
4. Commercial Pure Grade Aluminum Flat Roof Flashing (choice of bronze, black or mill finish)
5. (6) 1.5" Phillips Head Stainless Steel Screws
6. Heavy Duty Foil Tape
7. (2) 24" Light Pipe Sections
8. White Nylon Horse Hair Gasket (self-adhesive)
9. (8) Phillips Head Stainless Steel .5" Self-Tapping Screws
10. (3) Black Speed Nuts
11. Aluminum Ceiling Ring
12. White Powder Coated Aluminum Trim Ring
13. Prismatic or Soft White Diffuser (flat or domed profile)
14. (3) 1.5" Phillips Head Screws

