



# Pitched Roof

## TUBULAR SKYLIGHTS

EASILY AND AFFORDABLY

## Add Soft, Natural Light

Tubular Skylights offer homeowners an affordable day-lighting option for rooms where adding additional windows isn't practical. Unlike traditional skylights, tubular skylights use a "light pipe" to collect the sun's rays without transferring the sun's heat. As sunlight enters through the skylight dome, the rays bounce downward inside the light pipe until emitted through the ceiling's diffuser. Our pitched roof model features a flashing with an angled design to offset the slope of the roof and allow light pipe to stay vertical.



SLOPED ROOF



RESIDENTIAL

## Pitched Roof Tubular Skylight

10" | 13" | 18" Models

- Attaches directly to the roof decking
- Designed for residential pitched roofs 2:12 and steeper
- Installs easily with no structural changes or wiring required
- Performs optimally from sunup to sundown
- Disperses light evenly while blocking 99% of harmful UV rays
- Condensation release dome prevents fogging due to humidity
- Aluminum housing is powder coated both inside and out to prevent corrosion
- Available in 3 colors: black satin, bronze gloss or mill finish
- Hurricane Tested and Rated, HVHZ Compliant
- Florida Building Code Approved
- Limited Lifetime Warranty



# Pitched Roof Tubular Skylight Specs



**10" Kit**

Model #:	10KPF
Coverage:	up to 150 sf
Wattage:	up to 300 sf
Kit Height:	4 feet
Max Length:	18 feet
Roof Slope:	2:12 & up
Flashing Colors:	● ● ●



**13" Kit**

Model #:	13KPF
Coverage:	up to 300 sf
Wattage:	up to 500 sf
Kit Height:	4 feet
Max Length:	20 feet
Roof Slope:	2:12 & up
Flashing Colors:	● ● ●



**18" Kit**

Model #:	18KPF
Coverage:	up to 500 sf
Wattage:	up to 1,000 sf
Kit Height:	4 feet
Max Length:	20 feet
Roof Slope:	2:12 & up
Flashing Colors:	● ● ●

## Accessories



**Dimmer Kit**

Dims incoming light entering home during daytime hours.




**Electric or Solar Light Kits**

Installs inside tube shaft to provide light at nighttime.



**Vent Kit**

Exhaust system for 10" model – perfect for bathrooms.



**Extra Light Pipe / Elbows**

12" or 24" pipe extensions and elbow/angle adapters.



**Flashing Skirt**


Ensures a weather-tight installation on tile roofs.




**Turret Extension**

Raises dome assembly 3" to clear thicker tiles.




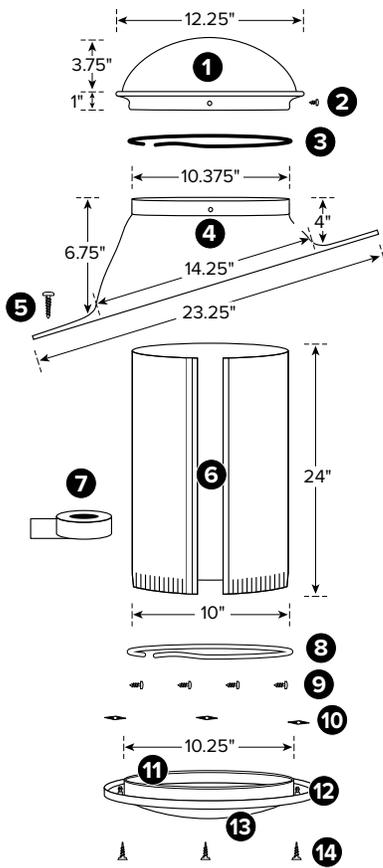

**10" MODEL**

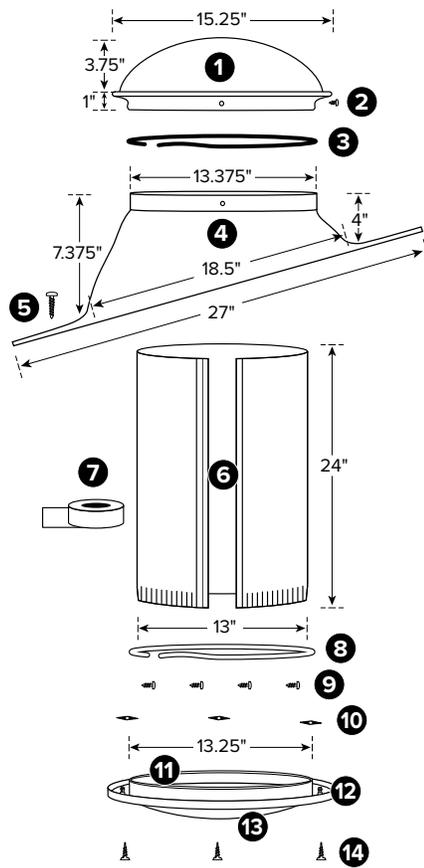

**13" MODEL**

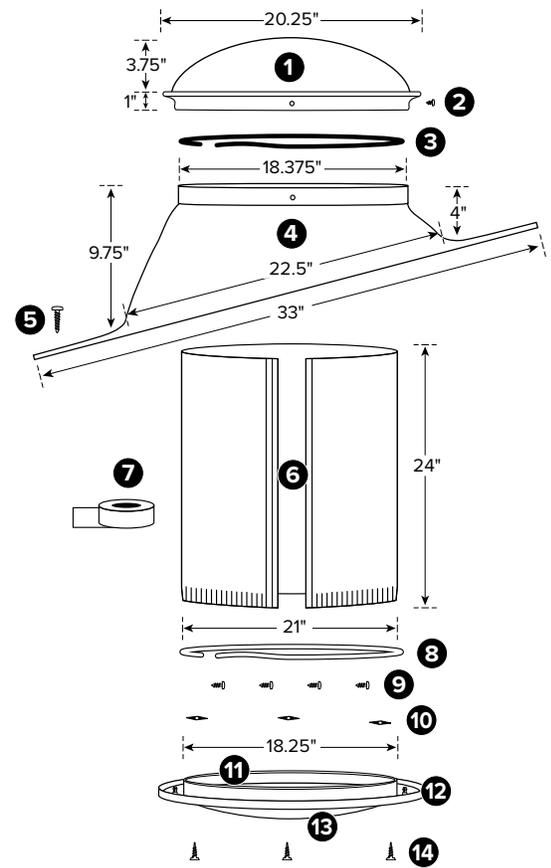

**18" MODEL**

**PITCHED ROOF  
RESIDENTIAL MODEL  
TECHNICAL SPECIFICATIONS**

Model	Coverage	Wattage	Max Tube
10"	up to 150 sf	up to 300 watts	18'
13"	up to 300 sf	up to 500 watts	20'
18"	up to 500 sf	up to 1,000 watts	20'

*Note: 18" model used on homes with 24" on center construction.*

1. Clear UV Protected, 100% High Impact Modified Acrylic Dome
2. (4) Phillips Head Stainless Steel .25" Sheet Metal Screws
3. Black Nylon Horse Hair Gasket (self-adhesive)
4. Commercial Pure Grade Aluminum Flashing (choice of bronze, black or mill finish)
5. (6) 1.5" Phillips Head Stainless Steel Screws
6. Heavy Duty Foil Tape
7. (2) 24" Light Pipe Sections
8. White Nylon Horse Hair Gasket (self-adhesive)
9. (8) Phillips Head Stainless Steel .5" Self-Tapping Screws
10. (3) Black Speed Nuts
11. Aluminum Ceiling Ring
12. White Powder Coated Aluminum Trim Ring
13. Prismatic or Soft White Diffuser (flat or domed profile)
14. (3) 1.5" Phillips Head Screws

